



FIBERGLASS HOUSE-TYPE DOORS



Standard Features

*Heavy, damage resistant fiberglass panels are securely bonded to the core. *Effective insulating foam core. *High density foam lock block. *Welded galvanized steel frame which is pre-cambered on the lock side to promote a tight seal. *Core is surrounded by extruded aluminum. *Core is edge bored and capped for easy addition of deadbolt. *Residential style butt hinges used to mount in-swinging core. *Pre-finished MDF jamb system. *Lock-side metal blind stop and integral sealing system. *Thermally broken threshold. *Double leaf sill sweep. Adjustable strike plate. *Self-storing heavy duty aluminum framed storm door with stainless steel bushings in the hinges. *Manufactured to comply with HUD standard 3280-405.

Our Combination Doors come standard with:

*Oriel/ Self Storing Storm Door and Storm Door Hardware
 *4 1/2" LVL Wood Jamb
 *White Outside on White Inside Pebbled Fiberglass Core Door fitted with 4" x 24" Stationary Window
 Lockset, Putty tape, drip caps and screws sold separately.
 Please see next page for options. See charts below for part numbers.




How to Identify Left or Right Hand:

Look at the storm door from the outside of the home. The side with the hinges determines left or right hand. (Example: hinges on the right, right-hand door)

Doors




9 Window Styles from which to choose ▶

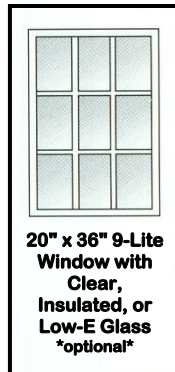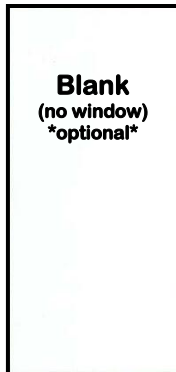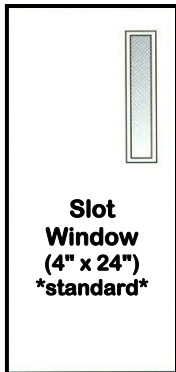

Left-Hinged Doors		
Call Size	White Finish	Mill Finish
32 x 72	84109-W	84109-M
32 x 76	84120-W	84120-M
32 x 78	84131-W	84131-M
34 x 76	84142-W	84142-M
34 x 78	84153-W	84153-M
34 x 80	84164-W	84164-M
36 x 76	84187-LW	84187-LM
36 x 80	84175-W	84175-M
38 x 76	84326-W	84326-M
38 x 80	84328-W	84328-M

Right-Hinged Doors		
Call Size	White Finish	Mill Finish
32 x 72	84110-W	84110-M
32 x 76	84121-W	84121-M
32 x 78	84132-W	84132-M
34 x 76	84143-W	84143-M
34 x 78	84154-W	84154-M
34 x 80	84165-W	84165-M
36 x 76	84187-RW	84187-RM
36 x 80	84176-W	84176-M
38 x 76	84327-W	84327-M
38 x 80	84329-W	84329-M

5 Storm Door Options

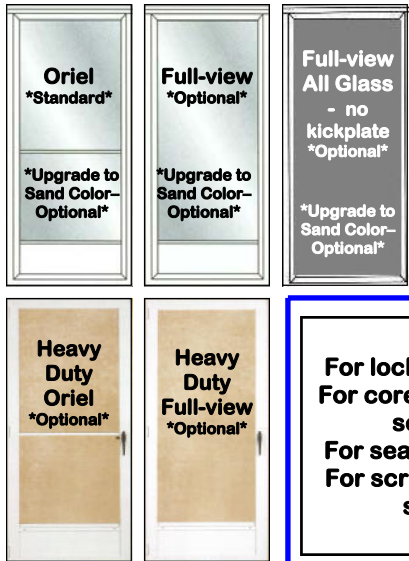

Shipping Note

*Inside-Swing House-Type Doors must ship by freight unless located within local delivery route area. Please contact us for an exact shipping and handling quote.

For locksets, see page 16.
 For core door components, see next page.
 For sealants, see page 80.
 For screws and fasteners, see page 82.

Note: The "call size" is the measurement of the stud-to-stud rough opening in the wall, and not the exact measurement of the door itself! For more help on how to measure for this door, please see page 3.

