



FURNACES AND ACCESSORIES



◀ Electric Down-Flow Furnaces ▶

*Upflow/Downflow convertible- Top/Front Return Air convertible- Capable of fulfilling the heating requirements of almost any manufactured home, in addition to handling up to 48,000 BTUS of air conditioning- Zero clearance feature allows furnace to be installed where space is at a premium- Available in a wide range of kilowatt sizes- Built-in coil cabinet makes it easy to add on a heat pump or an air conditioner- 4-speed blower allows installer to adjust the air delivery to meet the requirements of any size of home- Attractive pre-painted front panels provide an easy-to-clean scratch-resistant appliance finish- Heating package includes long-lasting nickel/chrome heat elements- Unit dimension: 51.5" high x 23" wide x 19.5" deep.

- 53810**- 10 KW / 34,000 BTU
- 53811**- 12 KW / 39,000 BTU
- 53812**- 15 KW / 51,000 BTU
- 53813**- 17 KW / 55,000 BTU
- 53814**- 20 KW / 67,000 BTU
- 53815**- 23 KW / 77,000 BTU



Universal throw-away filter cleans the air, and is easy to replace.

Built-in coil cabinet is design-matched to work in conjunction with Coleman heat pumps and air conditioners, providing ease of installation and highly efficient operating performance.

Sound absorbing insulation for quieter operation.

Air conditioner and heat pump ready, all models have a multi-speed blower capable of handling cooling and heat pump loads.

Equipped with built-in circuit breakers instead of fuses.




HVAC



◀ Gas Down-Flow Furnaces ▶

Quiet operating resulting from a full-louver door design to enhance air flow while reducing noise- Corrosion resistant aluminized steel wrap-around heat exchanger with round corner construction results in superior stress resistance and more heat distribution. Attractive pre-painted front panels provide an easy-to-clean scratch-resistant appliance finish- 95% High-efficiency MG9S designed to save money- Integrated control module with built-in diagnostics and fault code display- Factory 15 year warranty on heat exchangers- Convertible to use propane (LP) gas- Unit dimensions: 76" high x 20" wide x 24" deep.


- 53820**- 81.3 A.F.U.E./ 56 K BTU Heating
- 53821**- 80.0 A.F.U.E./ 70 K BTU Heating
- 53822**- 80.0 A.F.U.E./ 75 K BTU Heating
- 53823**- 80.0 A.F.U.E./ 95 K BTU Heating

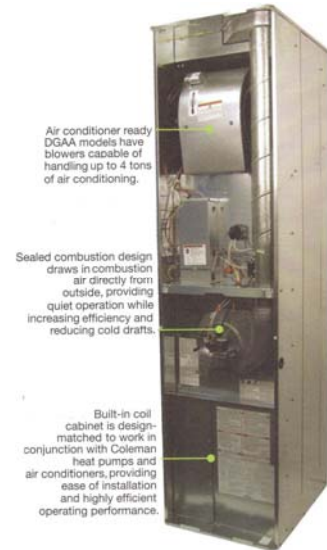

Air conditioner ready DGAA models have blowers capable of handling up to 4 tons of air conditioning.

Sealed combustion design draws in combustion air directly from outside, providing quiet operation while increasing efficiency and reducing cold drafts.

Built-in coil cabinet is design-matched to work in conjunction with Coleman heat pumps and air conditioners, providing ease of installation and highly efficient operating performance.



▲ **56651**- 5" Duct Connector *For all furnaces



▲ **53835**- Buss Bar Kit for Electric Furnace- "P-Jumper"



Hinged Louvered Furnace Door

*Single panel- Bright white- Cold rolled steel with baked-on, textured enamel finish- Reinforced with three 3" wide, 24 gauge cold-rolled steel stiffeners welded to back and flanges of panel- Meets ventilation standards- No jamb required- Welded-on hinges- Meets requirements per ASTM E84-94- Easy to install.

- 53722**- 22 x 78 1/2 (Finished Opening size 22 1/4 x 80 1/4)
- 53724**- 24 x 78 1/2 (Finished Opening size 24 1/4 x 80 1/4)



- 57101**- Furnace Roof Jack- 86" to 95" ▲
 - 57121**- Furnace Roof Jack- 91" to 102" ▲
 - 57141**- Furnace Roof Jack- 99" to 120" ▲
- * Size range is from floor to flange of roof jack

53830 A-Coil Shelf Kits ▶
*For use with electric furnaces if using an a-coil



For floor vents, see page 30.
For air conditioners and ducting, see page 64.

