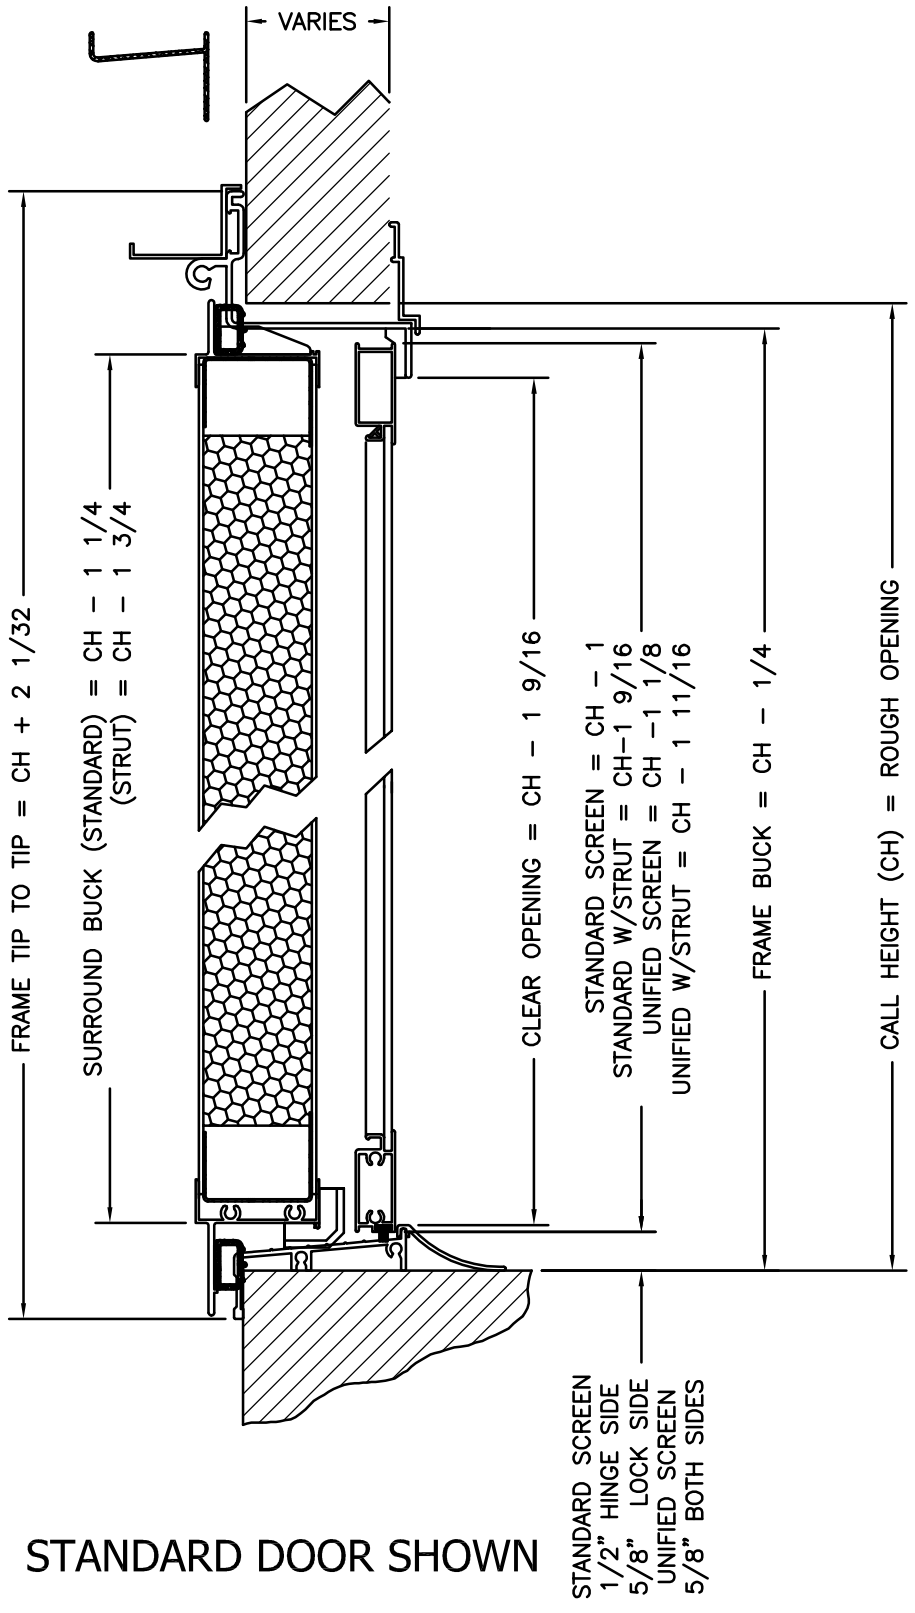

STANDARD DOOR SHOWN

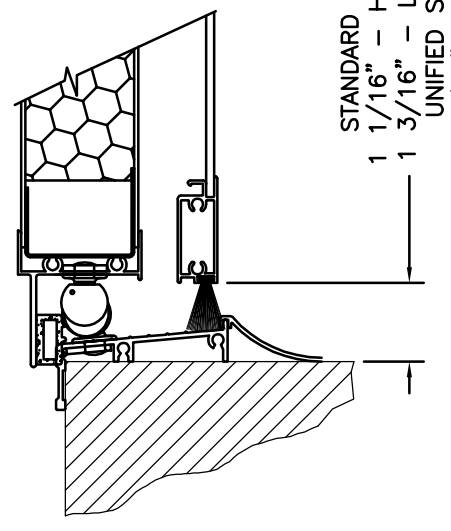

GAS STRUT OPTION

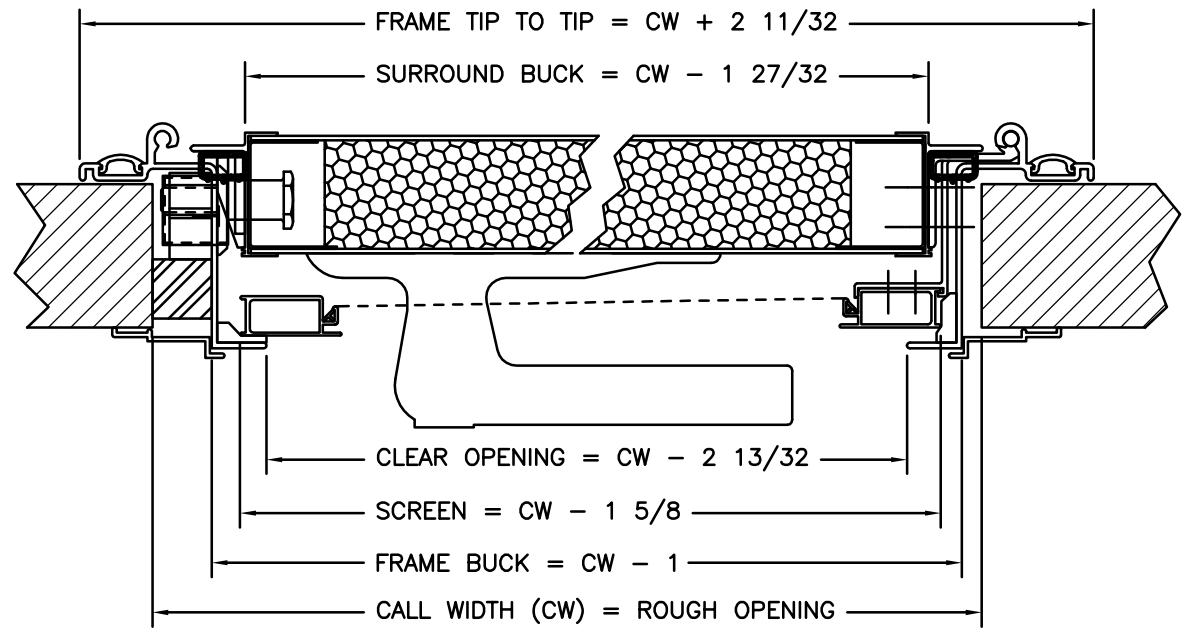

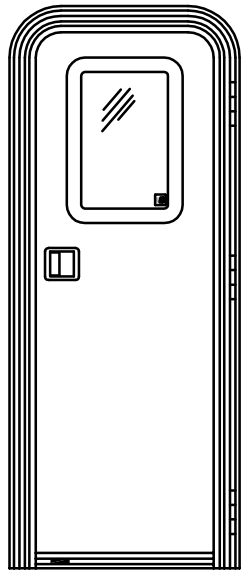

Ⓝ	15	GAS STRUT SUB–ASSY (SEE 53227)	1–OPT
	14	WOOD SPACER (LOCK JAMB)	1
	13	EXT. WINDOW OPTS. (SEE BOM FOR SIZES)	1–OPT
	12	TOUCH–UP PAINT	AS REQ
	11	DRIP CAP–BENT	1–OPT
		DRIP CAP–BENT (WEST)	1–OPT
	10	SCREW COVER–FLEXIBLE	1–OPT
	9	TRIM RING	1–OPT
	8	THRESHOLD–1 3/8"	1–OPT
		THRESHOLD–1 1/8" (FLAT)	1–OPT
	6	SHIPPING SPACER–WEDGE BLOCK	6
	5	SCREW–FRAME HINGE TO SCREEN	9
	4	SCREW–FRAME HINGE TO DOOR LEAF	9
	3	SCREEN DOOR SUB–ASSEMBLY	1
	2	DOOR LEAF SUB–ASSEMBLY	1
	1	OUTER FRAME SUB–ASSEMBLY	1
	DET	DESCRIPTION	REQ

REVISIONS

SYM	ECN	CHANGE	BY	DATE

REVISIONS REVISION HISTORY

SYM	ECN	CHANGE	BY	DATE

REFERENCE

AREA (SQ–IN)

LIN WT (LBS/FT)

STANDARD TOLERANCES
ALL DIMENSIONS ARE INCHES UNLESS SPECIFIED OTHERWISE
FRACTIONS ± 1/16
DECIMALS .XX ± .010
DECIMALS .XXX ± .005
ANGLES ± .5°

DRAWN TK DATE 06–09–99
CHECKED BY JSix DATE 11–01–12
MATERIAL n/a

DEXTER

THIS DRAWING IS THE SOLE PROPERTY OF DEXTER AXLE AND MUST NOT BE COPIED OR ANY INFORMATION CONTAINED WITHIN USED WITHOUT THE EXPRESSED WRITTEN PERMISSION OF DEXTER AXLE.

DO NOT SCALE FROM THIS DRAWING

DESCRIPTION
5055 RC DOOR w/ROTARY LOCK INSTALL DIMENSIONS

REVISION

SCALE

PART No. N/A

SH 1 OF 1